

DUCT FANS





BKKF

SQUARE DUCT FANS Backward Curved

Removable panels provide flexibility on air flow direction.
Suitable mounting at each mounting position.
Safe and no maintenance needed.
Panels with double walls are manufactured of 20mm mineral wool isolated galvanize sheetsteel.

Technical Drawings



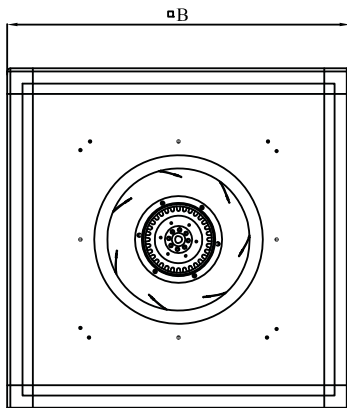
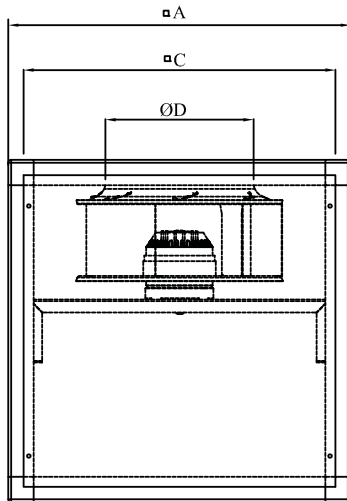


- MATERIAL** : Casing is made of galvanized sheet metal, fan with backward curved impeller is made of aluminium
- INSULATION CLASS** : Class F
- MAX. HAVA TAŞINIMI** : 50°C
- DIRECTIVE** : EN 60335-1, EN 60335-2-80
- SPEED CONTROL** : Speed can be adjusted using an optional controller.
- APPLICATION AREAS** : BKEF-R fan series are perfect to use in residential, commercial, and industrial environments, especially where pressured air is needed to be transferred. They are widely used in industrial kitchens, cafes and restaurants, as well as gymnasiums, shopping centers, hospitals, factories, offices etc. They are also used in Air Handling Units (AHU) for air supply.

TYPE	A	B	C	D
BKKF 400	670	670	610	270
BKKF 450	670	670	610	283
BKKF 500	670	670	610	344
BKKF 560	800	800	740	382

Dimensions are in (mm)

TYPE	VOLTAGE	FREQUENCY	POWER	CURRENT	SPEED	AIR FLOW	SOUND PRESSURE LEVEL	WEIGHT
	V	Hz	KW	(A)	d/d	m ³ /h	dB(A)	kg
BKKF 400	230	50	345	1,5	1400	3900	50	36
BKKF 450	230	50	620	2,8	1400	4800	55	40
BKKF 500	380	50	950	2,4	1400	7100	60	51
BKKF 560	380	50	1550	2,8	1400	9200	62	65

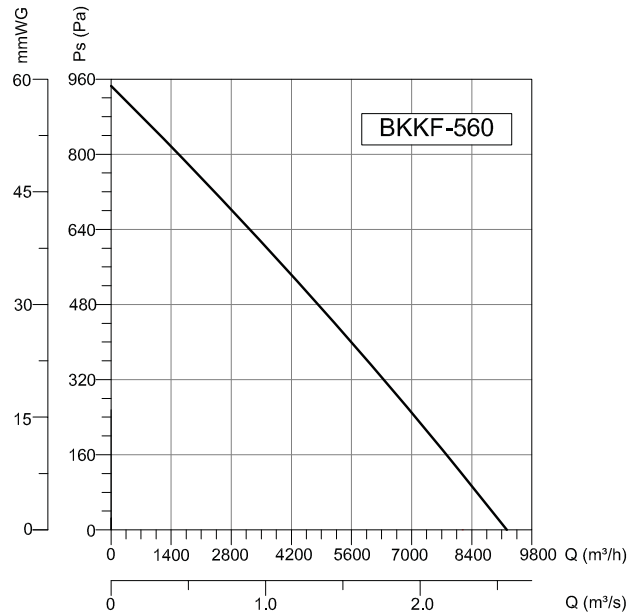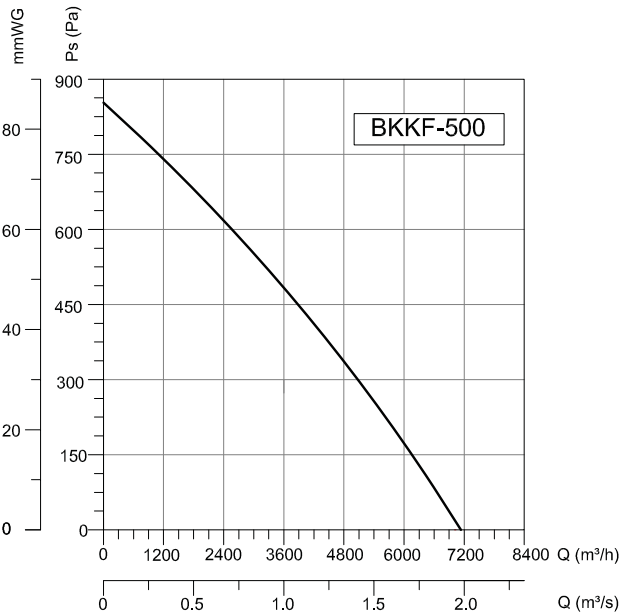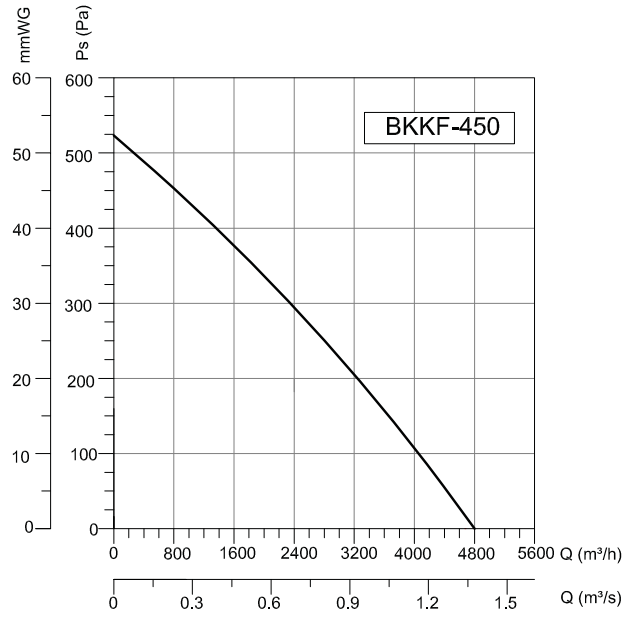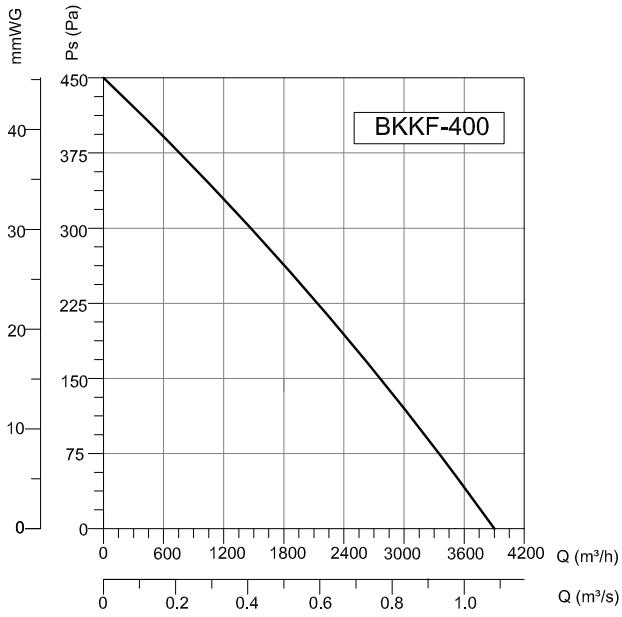

Accessories



DUCT FANS

ROOF FANS

AXIAL FANS

RADIAL FANS

PLASTIC FANS

VENTILATORS

SMOKE EXHAUST SYSTEMS

ACCESSORIES